

Taylor Maxwell has been supplying high-quality timber products for over 60 years, working in partnership with leading manufacturers across the UK and Europe.


With a dedicated flooring showroom in Portishead, specialist flooring section within our Clerkenwell site and an additional 14 locations across the UK, our offering goes far beyond timber—encompassing a wide range of brick and facade solutions.

This breadth of expertise makes us a trusted partner not only in flooring, but across the entire construction industry.

We also understand the importance of the role organisations like ours play in the fight to for a **sustainable future**. The built environment is a major contributor to global carbon emissions and it is now our challenge to take action and encourage our partners to do the same.

Our mission is to be carbon net zero in our own operations (scope 1 and 2) by 2030 and we're taking steps to reduce our emissions now.

QUALITY FLOORING TRUSTED SERVICE.

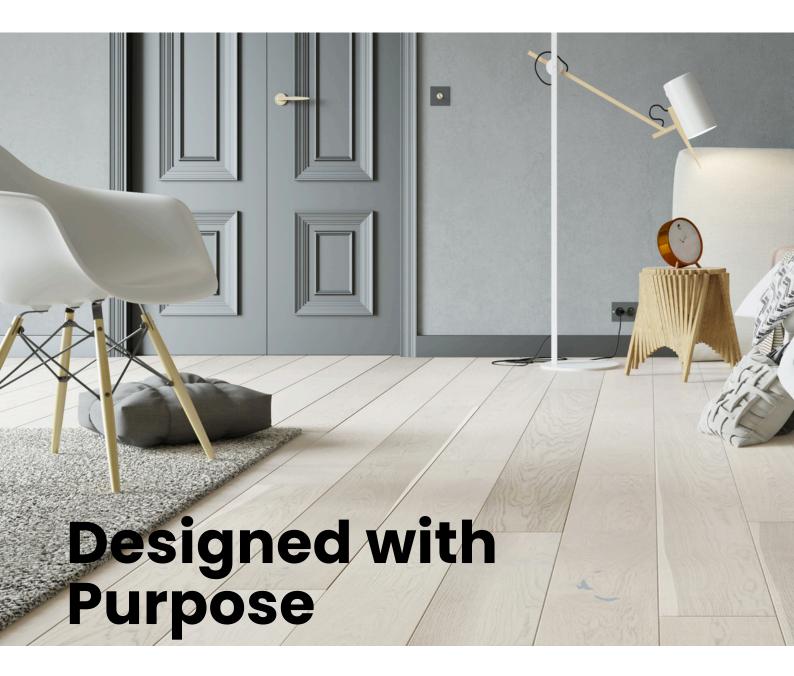


The Bosco Collection, a range of outstanding engineered wood flooring.


Defined by its durability and a clean, refined aesthetic, this floor is regarded as a key material for a range of domestic and commercial property developments. The collection provides a high-quality alternative to solid oak and laminate flooring and is available in a variety of sizes and colourways. Such choice means you are sure to find the perfect aesthetic for your project, guided from start to finish by our expert team.

Structure and style

Constructed from a durable hardwood layer overlayed on a plywood - or mixed plywood and softwood centre, our engineered wood flooring can be delivered in a range of finishes and choice of thicknesses.

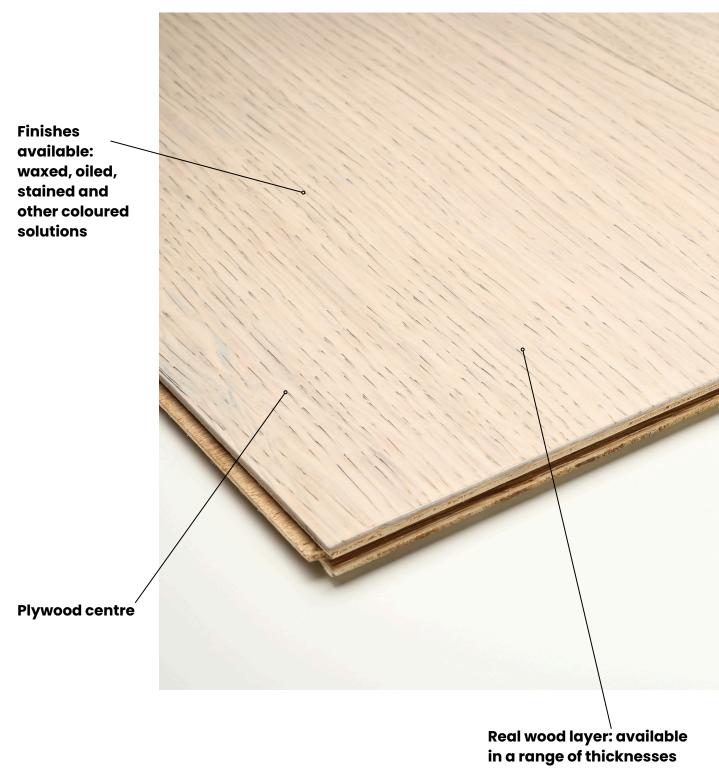






Plank

Thickness: 11 - 21mm Width: 90 / 120 / 140 / 180 /


220 / 250mm

Length: 500 - 2400 mm



Herringbone

Thickness: 11-21 mm **Width:** 90 / 120 / 140 mm **Length:** Standard 450 mm



Chevron

Thickness: 11-21 mm **Width:** 90 / 120 / 140 mm

Length: 600 mm

Formats

Achieve the look you want with our range of design formats. We stock our engineered flooring in various widths and finishes, including Herringbone, Plank and Chevron.



We're dedicated to delivering flooring that excels in both aesthetic appeal and long-lasting performance. Our engineered floor complies with European standards for fire safety (EN 13 501/Cfl-s1) and the formaldehyde emissions regulations (EN 717-1/E1).

We use European materials, manufacturers and sawmills who share our values for creating ethically sourced flooring to supply products that will seamlessly integrate into residential and commercial interiors.

We manufacture in the same European factory and production line, which ensures continuity throughout all our products. This means you can be sure of a clean and consistent finish throughout your project.

Colours and Finishes

The Bosco Collection offers a range of colours — some of which are showcased below. However, we can **produce any custom colour** you require, subject to minimum order quantities.

The collection also comes in a selection of finishes -

Natural Oil & Hardwax Oil finishes soak into the wood, enhancing its grain while providing a natural look.

The lacquer finish provides a surface-level protective coating by applying it in various gloss levels.

And the Nano lacquer finish, an advancement on the traditional lacquer, offers superior durability and slip resistance.







0 8



Grades Rustic / Nature / Select



Rustic

Rustic grade allows up to five healthy or unhealthy knots per linear metre, each no larger than 30mm. It also permits filled splits and cracks up to 150mm long and 3mm wide. Natural features such as silver grain, wood rays, and mineral streaks are acceptable up to 150mm in length. However, bark pockets and holes or voids are not permitted.



Nature

Nature grade allows up to three healthy knots per linear metre (maximum 15mm each), and up to two filled unhealthy knots per linear metre, also up to 15mm. Holes, voids, splits, cracks, and bark pockets are not permitted. Subtle natural features such as silver grain, wood rays, and mineral streaks are acceptable up to 50mm in length, provided they are not visually prominent.



Select

Select grade permits up to two healthy knots per linear metre, each no larger than 3mm. Unhealthy knots, holes, voids, splits, cracks, bark pockets, and mineral streaks are not permitted. However, silver grain, wood rays, and heartwood are allowed.

PRODUCT INFORMATION

STRUCTURE Product Type Oak / Maple / Ash / Walnut

Surface Finish Nanotechnology lacquer / Lacquer /

Natural Oil / Hard-wax Oil

Core Structure Plywood

Special Construction Nano Technology

Construction Engineered

Specie European oak, ash, Canadian maple,

American black walnut

DIMENSIONSPlank / Herringbone / Chevron

30°&45°

Overall Thickness 11-21 mm

Dimensions Please see details on Format Page 06

Fire Behaviour EN 13 501/Cfl-s1

DATA

INSTALLATION

Formaldehyde Emissions EN 717-1/E1

Footfall Noise Reduction DIN EN ISO 10140-3 18db

Warranty 25 Years

Garding Rustic / Nature / Select

Sustainable Certificate FSC Certification

Installation Floating or fully bonded

System T & G

Underfloor Heating Suitable

Suitability Domestic & Commercial



QUALITY FLOORING TRUSTED SERVICE.

Our promise


As a leading importer and distributor, we maintain a wide and varied stock of flooring in the UK—ensuring excellent availability and prompt delivery.

Every product we supply is backed by the strength, stability, and the reputation of the Taylor Maxwell brand. Drawing on decades of industry expertise, we continue to support high-profile projects, including Stirling Prize-nominated developments, by sourcing premium materials from trusted, well-established suppliers.

Here to Help

Our knowledgeable team is ready to discuss your project requirements and help you find the right flooring solution. Get in touch to speak with one of our flooring specialists today.

Please note: All technical information is provided by the manufacturer. All liability and responsibility for the testing and performance of the product rest solely with the manufacturer. Taylor Maxwell accepts no responsibility or liability in relation to the accuracy of this information or the testing of these products.

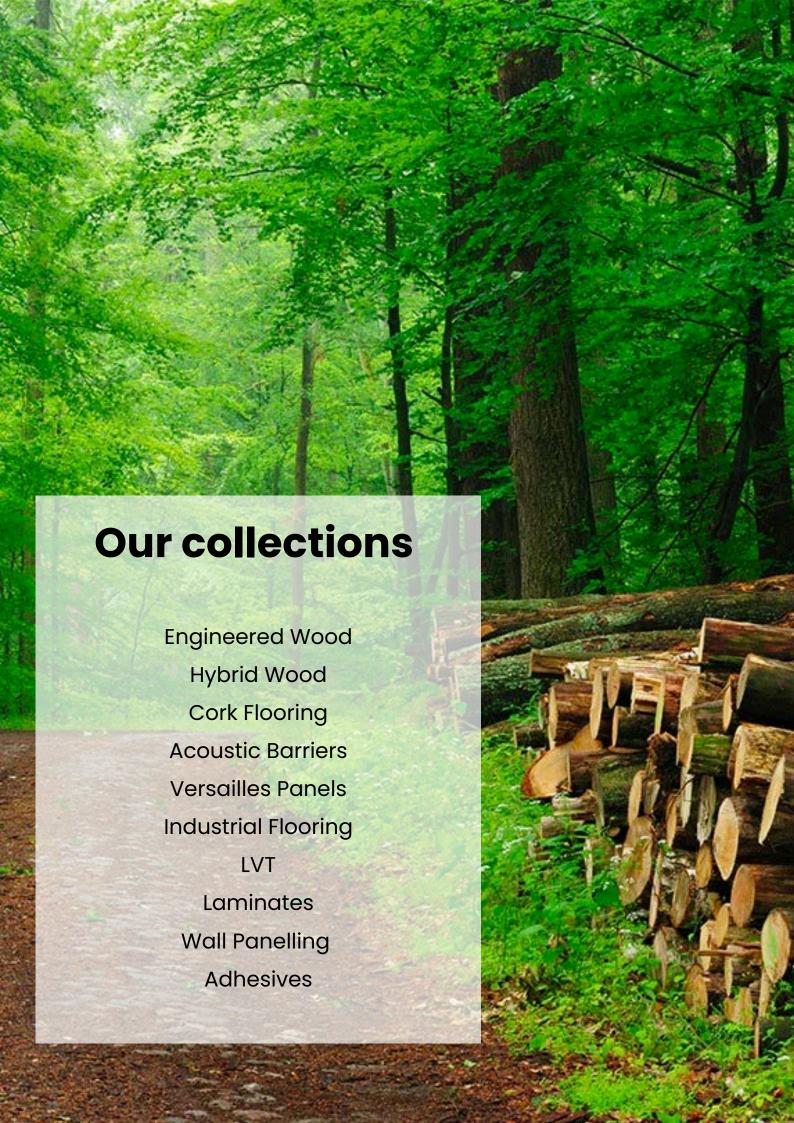



Contact

Jon Wookey 07774 470525

Dan Mathews 07887 511996

E: flooring@tmtimber.co.uk

For latest information please visit www.taylormaxwell.co.uk

Showrooms

Taylor Maxwell
63 Central Street
Clerkenwell
London
ECIV 3AF

Taylor Maxwell Hardwood Units 22 & 23 Old Mill Road Portishead Bristol BS20 7BX

By appointment only